COMMERCIAL DATA SHEET

Quadra Sparkling 460 XL

Billi Quadra Sparkling 460 with XL Levered Dispenser

The Quadra Sparkling is the ultimate in modern design and filtered drinking water appliances delivering instant boiling and chilled filtered water, with the added luxury of sparkling water.

Utilising underbench ice bank technology to enhance capacity and recovery, all three output options are conveniently delivered by operating the DDA compliant position sensitive levers on the single above bench XL levered dispenser.

The Quadra Sparkling has a commercial capacity and is suitable for any environment.


XL Levered Dispenser

Quadra Sparkling Under-Bench Unit









Features

Australian Made Boiling Unit * Italian Design & Made Sparkling Unit



Based on a set volume of water being drawn every 30 seconds at an inlet temperature of average temperature 21°C. Each cup is equivalent to 170ml. Usage patterns and draw-off methods can impact recovery

Accessories

992800 - 70mm Ris	er & Font
-------------------	-----------

992820 - 70mm Riser





992830 - 120mm Riser



GM - Gun Metal G

BRG - Brushed Rose Gold





K





	Add the Finish code to
Grey	the Product Code to
	finalise your specification,
	eg. 906060LMB

990726 - Tubing Extension Kit for Sparkling unit - 2mtrs

BR - Brushed

MW - Matte White

Finishes

MB - Matte Black

CH - Chrome

Special Order Finishes


RG - Rose Gold


PL - Platinum



TECHNICAL DRAWING & INSTALLATION REQUIREMENTS

PRODUCT DIMENSIONS

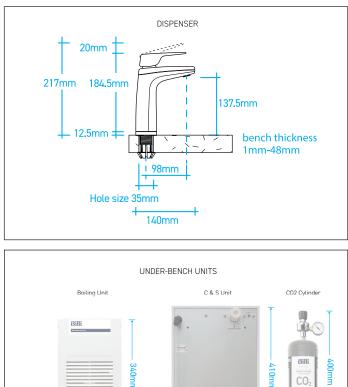

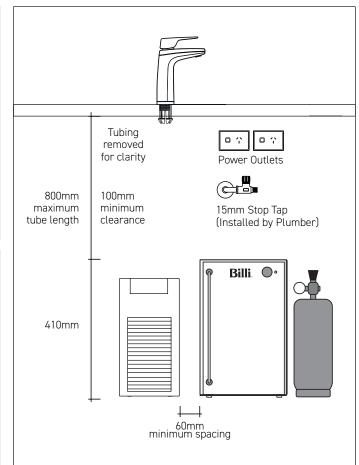

WATER SUPPLY

180mm -

Depth

A single 1/2" BSP (15mm) stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.

255mm

| 105mm|

Depth

POWER SUPPLY

Two (2 of) standard 10 amp power outlets are required, no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

FILTRATION

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene. Filter supplied: 994051 (5 micron). Replacement filters available: 994052 (0.2 micron), 994054 (HSD), 994055 (XPHSD), 994056 (Sediment only) and 994060 (0.2 micron sediment only).

CERTIFICATIONS

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: Watermark: WM-022690; Tested to ATS5200.105 and AS/NZ 4020; ISO 9001:2015, QEC 11627; AS1428; HACCP: PE-872-WAT-1-02; WELL Cornerstone Member.

CO₂ Cyclinder

The CO₂ gas cylinder supplied must be secured in a suitable location. Each cylinder contains 1100g of CO₂ and should be installed in a well ventilated area. Each cylinder will provide between 200-350L of sparkling water depending on the unit settings. The MSDS is available on www.billi.com.au for a complete list of specifications and warnings. Replacement gas cylinders are available from Billi. CO₂ Cylinder - single 996911 or double 996912.

WARRANTY

The Billi Quadra Sparkling Range is covered by a comprehensive 2 year warranty on all parts and labour.



Billi Australia Pty Ltd

P 1800 812 321
W www.billi.com.au

Billi New Zealand Ltd T/As MerquipP 0800 636 0 636W wwww.merquip.co.nz



in



PREFERRED INSTALLATION LAYOUT