COMMERCIAL DATA SHEET Sahara 3120 XT



Billi Sahara 3120 with XT Touch Dispenser

The Sahara 3120 Boiling and Still drinking water system is a large commercial capacity system, but still maintains Billi's core design principles of space saving while requiring no joinery ventilation.

Offering both boiling water and a bottomless supply of filtered ambient temperature water, the Sahara range is convenient and functional.

The XT touch dispenser is an innovative, contemporary design, which has a top operating panel offering a sophisticated and clean style.









XT Touch Dispenser

Sahara Under-Bench Unit



Features











SPACE SAVING DESIGN

SAFE TO OPERATE

SPLASHFREE DELIVERY

ENERGY EFFICIENT

NO CUPBOARD VENTILATION REQUIRED









ECO-INTELLIGENCE TECHNOLOGY

DESIGNED 8 MADE

HACCP CERTIFIED

INSTALLATION

PRODUCT SPECIFICATIONS


Water type	Product code	Model name	Dispenser	Suggested no. of people	Boiling water delivery (cups per hour)*	Still water delivery (cups per hour)	Power supply (amps)
BOILING STILL	943120T	Sahara 3120	XT Touch	Up to 120	Up to 220	Unlimited	15

^{*} Based on a set volume of water being drawn every 30 seconds at an inlet temperature of average temperature 21°C. Each cup is equivalent to 170ml. Usage patterns and draw-off methods can impact recovery.

Accessories

992800 - 70mm Riser & Font

992820 - 70mm Riser











Ī

992830 - 120mm Riser

 $\boldsymbol{990720}$ - Tubing Extension Kit for X series dual temp dispensers 2mtrs

Finishes

Standard Finishes

CH-Chrome BR-Brushed

MB - Matte Black


MW - Matte White

Special Order Finish

 $\hbox{\bf RG-}\hbox{\bf Rose}\hbox{\bf Gold}$

TECHNICAL DRAWING & INSTALLATION REQUIREMENTS

PRODUCT DIMENSIONS

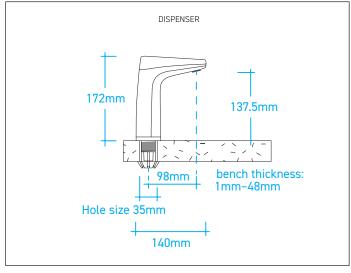



WATER SUPPLY

A single 1/2" BSP (15mm) stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.


POWER SUPPLY

A standard 15 amp power outlet is required, no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

FILTRATION

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene.

PREFERRED INSTALLATION LAYOUT

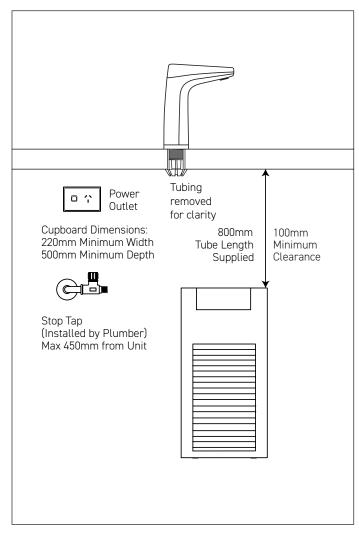

Filter supplied: 994051 (5 micron). Replacement filters available: 994052 (0.2 micron), 994054 (HSD), 994055 (XPHSD), 994056 (Sediment only) and 994060 (0.2 micron sediment only).

CERTIFICATIONS

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: Watermark: WM-021525; Certified to AS/NZ3498 and AS/NZ 4020; ISO9001:2015, QEC 11627; Section J6.6 of the BCA; HACCP: PE-872-WAT-1-02; WELL Cornerstone Member.

WARRANTY

The Billi Sahara Range is covered by a comprehensive 2 year warranty on all parts and labour.













Billi Australia Pty Ltd
P 1800 812 321

W www.billi.com.au

P 0800 636 0 636
W wwww.merquip.co.nz

visit us at







