COMMERCIAL DATA SHEET

Quadra Sparkling 4100 MMT

Billi Quadra Sparkling 4100 with Gooseneck Multifunction Mixer Tap

The Quadra Sparkling is the ultimate in modern design and filtered drinking water appliances delivering instant boiling and chilled filtered water, with the added luxury of sparkling water.

Utilising underbench ice bank technology to enhance capacity and recovery, the Quadra Sparkling has a commercial capacity and is suitable for any environment.

The Good Design Award Winning Multifunction Mixer tap complements the multifunctional approach of Billi's Quadra Sparkling range perfectly, negating the requirement for an additional domestic supply mixer tap while providing a sleek solution to dispensing filtered water.

Features Multifunction Mixer Tap Quadra Sparkling Under-Bench Unit Billi ecc ADJUSTABLE SPARKLING ICE BANK TECHNOLOGY SAFE TO OPERATE FCO-ADJUSTABLE INTELLIGENCE CHILLED TEMPERATURE TECHNOLOGY LEVEL Billi 4 ITALO-AUSTRALIAN PARTNERSHIP HACCP CERTIFIED CHOICE OF DISPENSER WINNING DESIGNS

Australian Made Boiling Unit * Italian Design & Made Sparkling Unit

PRODUCT SPECIFICATIONS

Water type	Product code	Model name	Dispenser	Suggested no. of people	Boiling water delivery (cups per hour)*	Chilled & Sparkling water delivery (cups per hour)	Power supply (amps)
BOILING CHILLED BOILING CHILLED	906100G	Quadra Sparkling 4100	Multifunction Mixer Tap	Up to 100	Up to 220	200	1 x 10 1 x 15

* Based on a set volume of water being drawn every 30 seconds at an inlet temperature of average 21°C. Each cup equivalent to 170ml. Usage patterns and draw-off methods can impact recovery.

Accessories

990726 - Tubing Extension Kit for Sparkling unit - 2mtrs

Standard Finishes Special Order Finishes Add the relevant Finishes CH - Chrome BR - Brushed RG - Rose Gold BRG - Brushed Rose Gold Code to the Product SKU to finalise your specification eg 906100GMB MB - Matte Black MW - Matte White GM - Gun Metal Grey








Finishes



TECHNICAL DRAWING & INSTALLATION REQUIREMENTS

PRODUCT DIMENSIONS

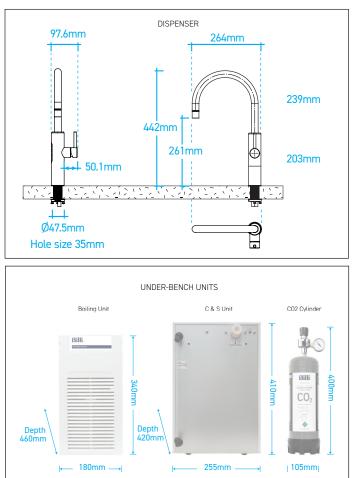

WATER SUPPLY

Domestic Cold and Hot mains supply is required via separate 1/2" BSP (15mm) stop-taps with male threads. These should be pre-installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.


POWER SUPPLY

A standard 10 amp power outlet plus an additional standard 15 amp outlet are required. Both outlets located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

FILTRATION

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene. Filter supplied: 994051 (5 micron). Replacement filters available: 994052 (0.2 micron), 994054 (HSD option), 994056 (Sediment only)

and 994060 (0.2 micron Sediment Only).

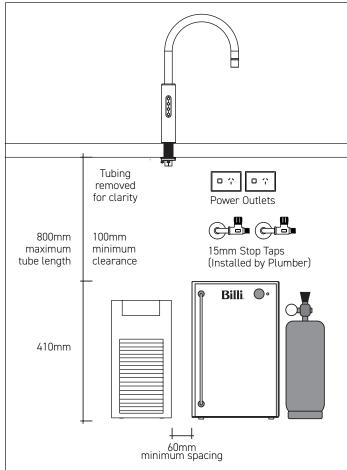

CERTIFICATIONS

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: Watermark: WM-022690; Tested to ATS5200.105 and AS/NZ 4020; ISO 9001:2015, QEC 11627; AS1428; HACCP: PE-872-WAT-1-02; WELL Cornerstone Member; WELS 5 Star Rating: WM-021914.

CO₂ Cylinder

The CO₂ gas cylinder supplied must be secured in a suitable location. Each cylinder contains 1100g of CO₂ and should be installed in a well ventilated area. Each cylinder will provide between 200-350L of sparkling water depending on the unit settings. The MSDS is available on www.billi.com.au for a complete list of specifications and warnings. Replacement gas cylinders are available from Billi. CO₂ Cylinder - single 996911 or double 996912

WARRANTY

The Billi Quadra Sparkling Range is covered by a comprehensive 2 year warranty on all parts and labour.



BilliTM is a trademark of Billi Australia Pty Ltd. All rights reserved. © Copyright protected. As Billi Australia Pty Ltd has a policy of continual improvement, all details are subject to change without notice. All goods are sold subject to our published terms and conditions. Plumbing licenses: WA PL5415, QLD 1315239, NSW 291743C, SA PGE284004. 1024

PREFERRED INSTALLATION LAYOUT